



EMC TEST REPORT

Product Name : Air sterilizer

Model Name : XD-B-500

Prepared for:

BEIJING MIWEI ENVIRONMENTAL SCI-TECH CO., LTD.
5th Floor, Building Materials Hall, Red Star Macalline, No.59
LaiGuangYing West Road, ChaoYang District, Beijing, China
TEL: /
FAX: /

Prepared by:

Shanghai Shifu Testing Service Co., Ltd.
No.1277 Yixian Road, Baoshan District, Shanghai, China
TEL: +86-21-51300821
FAX: +86-21-33637858

Report Number : SFT20MAR268C -2

Date of Report : Apr 25, 2020

Date of Test : Apr 06, 2020 to Apr 18, 2020

Notes :

The test results only relate to these samples which have been tested.

Partly using this report will not be admitted unless been allowed by SFT.

SFT is only responsible for the complete report with the reported stamp of SFT.



Report No. : SFT20MAR268C -2

Applicant: BEIJING MIWEI ENVIRONMENTAL SCI-TECH CO., LTD.
5th Floor, Building Materials Hall, Red Star Macalline, No.59 LaiGuangYing West Road, ChaoYang District, Beijing, China

Manufacturer: Shenzhen Jiale Technology Co., Ltd.
2F, No.11, Jinyuan 1st Road, Heao Community, Henggang Street, Longgang District, Shenzhen, China

Product Name: Air sterilizer

Brand Name: /

Model Name: XD-B-500

Ratings: 220-240V, 50/60 Hz, 610 W

Date of Receipt: Apr 05, 2020

Date of Test: Apr 06, 2020 to Apr 18, 2020

Test Standard: EN 55014-1:2017
EN 55014-2:2015
EN 61000-3-2:2014
EN 61000-3-3:2013

Test Result: PASS

Prepared by : _____

Approved by : _____





TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
2.	TECHNICAL SUMMARY	5
3.	TEST EQUIPMENT LIST	7
4.	MAINS TERMINAL CONTINUOUS DISTURBANCE VOLTAGE	9
5.	MAINS TERMINAL DISCONTINUOUS DISTURBANCE VOLTAGE	12
6.	RADIATED DISTURBANCE TEST	13
7.	DISTURBANCE POWER	16
8.	HARMONIC CURRENT EMISSION TEST	17
9.	VOLTAGE FLUCTUATIONS AND FLICKER TEST	20
10.	ELECTROSTATIC DISCHARGE IMMUNITY TEST	21
11.	RF ELECTROMAGNETIC FIELD IMMUNITY TEST	23
12.	ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	25
13.	SURGE IMMUNITY TEST	27
14.	INJECTED CURRENT IMMUNITY TEST	29
15.	VOLTAGE DIPS	31
APPENDIX 1 PHOTOGRAPHS OF EUT		33
APPENDIX 2 PHOTOGRAPHS OF TEST SETUP		34



1. GENERAL INFORMATION

1.1 Description of EUT

Product Name: Air sterilizer
Model Name: XD-B-500
Serial Number: N/A
Rating: 220-240V, 50/60 Hz, 610 W
Applicant: BEIJING MIWEI ENVIRONMENTAL SCI-TECH CO., LTD.
5th Floor, Building Materials Hall, Red Star Macalline, No.59
LaiGuangYing West Road, ChaoYang District, Beijing, China
Manufacturer: Shenzhen Jiale Technology Co., Ltd.
2F, No.11, Jinyuan 1st Road, Heao Community, Henggang
Street, Longgang District, Shenzhen, China

1.2 Description of Test Facility

Site Description : Shanghai Shifu Testing Service Co., Ltd.
Name of Firm : Shanghai Shifu Testing Service Co., Ltd.
Site Location : No.1277 Yixian Road, Baoshan District, Shanghai, China

The site and apparatus are constructed in conformance with the requirements of ANSI C63.4, CISPR 16-1-1 and other equivalent standards.

1.3 Measurement Uncertainty

Conducted Emission Expanded Uncertainty : U = 1.26 dB
Radiated Emission Expanded Uncertainty : U = 3.02 dB



Report No. : SFT20MAR268C -2

2. TECHNIACL SUMMARY

2.1 SUMMARY OF STANDARDS AND TEST RESULTS

The EUT have been tested according to the applicable standards as referenced below:

EMISSION (EN 55014-1:2017, EN 61000-3-2:2014, EN 61000-3-3:2013)		
Test Item	Test Standard	Results
Mains Terminal Continuous Disturbance Voltage	EN 55014-1	P
Mains Terminal Discontinuous Disturbance Voltage	EN 55014-1	N/A
Disturbance Power	EN 55014-1	N/A
Radiated Emission	EN 55014-1	P
Harmonic Current Emissions	EN 61000-3-2:2014	P
Voltage Fluctuations and Flicker	EN 61000-3-3:2013	P

IMMUNITY (EN 55014-2:2015)		
Test Item	Basic Standard	Results
Electrostatic discharge Immunity	IEC 61000-4-2:2008	P
RF Electromagnetic Field Immunity	IEC 61000-4-3:2006+A1:2007 +A2:2010	P
Electrical Fast Transient/Burst Immunity	IEC 61000-4-4:2012	P
Surge Immunity	IEC 61000-4-5:2014	P
Injected Current	IEC 61000-4-6:2013+Cor 1:2015	P
Voltage Dips	IEC 61000-4-11:2004	P

Note: P means pass, F means failure, N/A means not applicable



2.2 Description of Performance Criteria

The variety and the diversity of the apparatus within the scope of this standard make it difficult to define precise criteria for the evaluation of the immunity test results.

If, as result of the application of the tests defined in this standard, the apparatus becomes dangerous or unsafe, the apparatus shall be deemed to have failed the test.

A functional description and a definition of performance criteria, during or as a consequence of the EMC testing, shall be provided by the manufacturer and noted in the test report, based on the following criteria:

2.2.1 Performance criterion A

The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

2.2.2 Performance criterion B

The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed however. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

2.2.3 Performance criterion C

Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.



3. TEST EQUIPMENT LIST

Mains Terminal Continuous Disturbance Voltage				
Equipment	Manufacturer	Model	Serial No.	Next Cal.
Shielding Room	CHENGYU	5m×4m×3m	CR	Sep 13, 2020
EMI Test Receiver	R&S	ESCI7	100787	Feb 24, 2021
Artificial Mains Network	TESEQ	NNB 51	33285	Feb 24, 2021

Radiated Disturbance Test				
Equipment	Manufacturer	Model	Serial No.	Next Cal.
3m Semi-anechoic Chamber	CHENGYU	9.2×6.25×6.15m	SAR	Sep 13, 2020
EMI Test Receiver	R&S	ESCI7	100787	Feb 24, 2021
EMC Shielding room	Changzhou FeiTe	8 x 5 x 3 mm	Nil	Dec 24, 2020
Broadband Log Antenna	Schwarzbeck	VULB 9163	9163-561	Jul 24, 2020

Harmonic Current Emissions				
Equipment	Manufacturer	Model	Serial No.	Next Cal.
Harmonic Currents and Flick Tester	APS	ECTS-3120T	550029	May 18, 2021

Voltage Fluctuations and Flicker Test				
Equipment	Manufacturer	Model	Serial No.	Next Cal.
Harmonic Currents and Flick Tester	APS	ECTS-3120T	550029	May 18, 2021

Electrostatic Discharge Immunity Test				
Equipment	Manufacturer	Model	Serial No.	Next Cal.
ESD Generator	SCHAFFNER	NSG 438	849	Feb 24, 2021

RF Electromagnetic Field Immunity				
Equipment	Manufacturer	Model	Serial No.	Next Cal.
Radiated Immunity Test System	TESEQ	ITS 6006	37546	Oct 10, 2020
Power Meter	TESEQ	PMR 6006	73819	Oct 10, 2020
Power Amplifier	MILMEGA	AS1860-50	1066592	Oct 10, 2020
Log Periodic Antenna	Schwarzbeck	STLP 9128 D	9128 D 048	Jul 24, 2020
Field Probe	ETS-Lindgren	HI-6105	00161798	Dec 08, 2020



Electrical Fast Transient/Burst Immunity Test				
Equipment	Manufacturer	Model	Serial No.	Next Cal.
EFT/SURGE Generator	TESEQ	NSG 3060	1468	Feb 24, 2021
Single Phase Coupling/decoupling Network	TESEQ	CDN 3061	1404	Feb 24, 2021

Surge Immunity Test				
Equipment	Manufacturer	Model	Serial No.	Next Cal.
EFT/SURGE Generator	TESEQ	NSG 3060	1468	Feb 24, 2021
Single Phase Coupling/decoupling Network	TESEQ	CDN 3061	1404	Feb 24, 2021

Injected Current Immunity Test				
Equipment	Manufacturer	Model	Serial No.	Next Cal.
Conducted Immunity Test System	TESEQ	NSG 4070	25795	Feb 24, 2021
Coupling/Decoupling Network	TESEQ	CDN M116S	35371	Feb 24, 2021


Voltage Dips Immunity Test				
Equipment	Manufacturer	Model	Serial No.	Next Cal.
EFT/SURGE Generator	TESEQ	NSG 3060	1468	Feb 24, 2021
Single Phase Coupling/decoupling Network	TESEQ	CDN 3061	1404	Feb 24, 2021

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and has been calibrated by accredited calibration laboratories.



4. MAINS TERMINAL CONTINUOUS DISTURBANCE VOLTAGE

4.1 DIAGRAM OF TEST SETUP

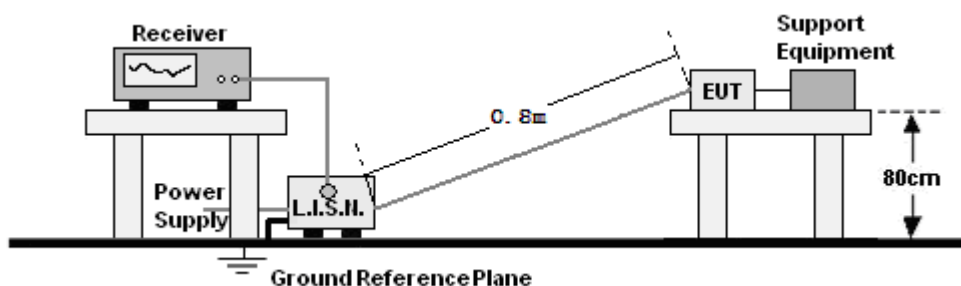

4.2 APPLICABLE STANDARD

EN 55014-1:2017

4.3 LIMITS FOR CONDUCTED DISTURBANCE

Frequency Range (MHz)	Limits dB(μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66-56	59-46
0.5 ~ 5	56	46
5 ~ 30	60	50

Note: Decreasing linearly with the logarithm of the frequency from.

4.4 TEST RESULT

Temperature : 22°C

Test Model : Operating


Humidity : 53%

Power Supply : AC230V/50Hz



Report No. : SFT20MAR268C -2

LINE:

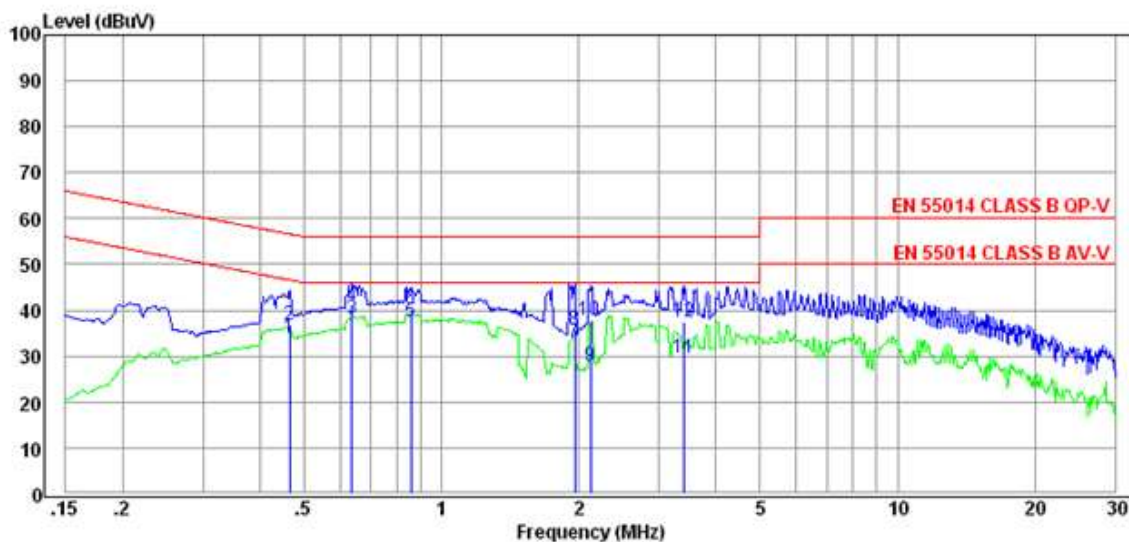


Freq MHz	Reading dBuV	C.F dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector
0.47	24.50	9.65	34.15	46.58	12.43	Average
0.47	27.27	9.65	36.92	56.58	19.66	QP
0.64	28.47	9.69	38.16	46.00	7.84	Average
0.64	31.23	9.69	40.92	56.00	15.08	QP
0.86	27.66	9.70	37.36	46.00	8.64	Average
0.86	30.67	9.70	40.37	56.00	15.63	QP
1.96	23.28	9.79	33.07	46.00	12.93	Average
1.96	25.88	9.79	35.67	56.00	20.33	QP
2.12	17.90	9.81	27.71	46.00	18.29	Average
2.12	27.93	9.81	37.74	56.00	18.26	QP
3.40	19.69	9.87	29.56	46.00	16.44	Average
3.40	27.54	9.87	37.41	56.00	18.59	QP

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



NEUTRAL:

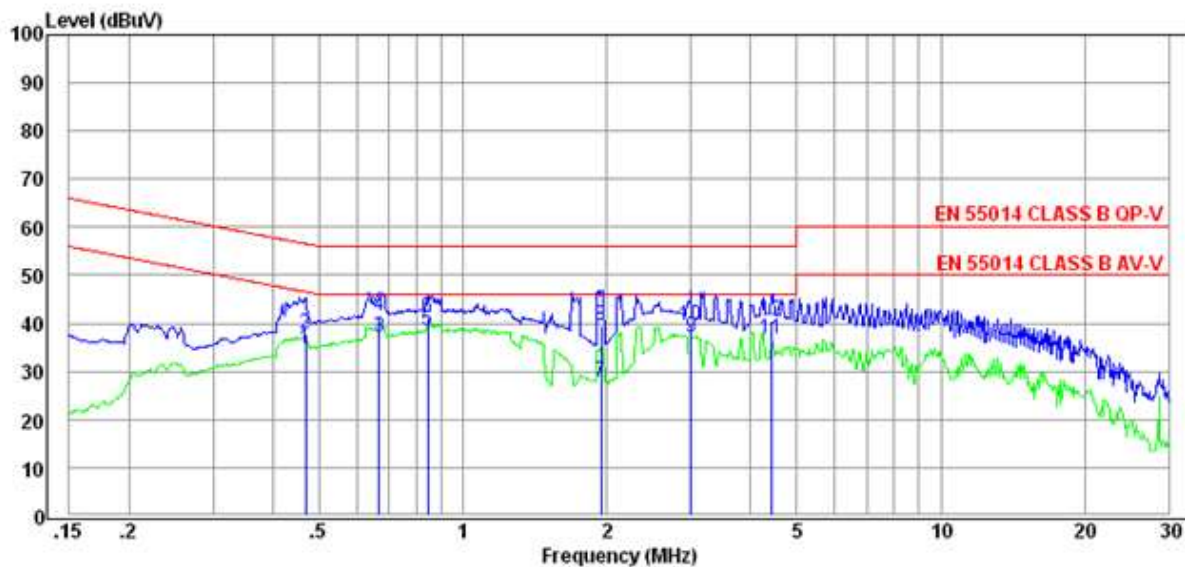

Freq MHz	Reading dBuV	C.F dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector
0.47	25.16	9.65	34.81	46.54	11.73	Average
0.47	27.99	9.65	37.64	56.54	18.90	QP
0.67	27.39	9.68	37.07	46.00	8.93	Average
0.67	32.04	9.68	41.72	56.00	14.28	QP
0.84	28.82	9.69	38.51	46.00	7.49	Average
0.84	31.50	9.69	41.19	56.00	14.81	QP
1.95	18.13	9.80	27.93	46.00	18.07	Average
1.95	29.81	9.80	39.61	56.00	16.39	QP
3.01	27.26	9.92	37.18	46.00	8.82	Average
3.01	29.64	9.92	39.56	56.00	16.44	QP
4.43	26.73	9.88	36.61	46.00	9.39	Average
4.43	30.63	9.88	40.51	56.00	15.49	QP

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain

4.5 TEST CONCLUSION

PASS



5. MAINS TERMINAL DISCONTINUOUS DISTURBANCE VOLTAGE


N/A

SECRET



6. RADIATED DISTURBANCE TEST

6.1 DIAGRAM OF TEST SETUP

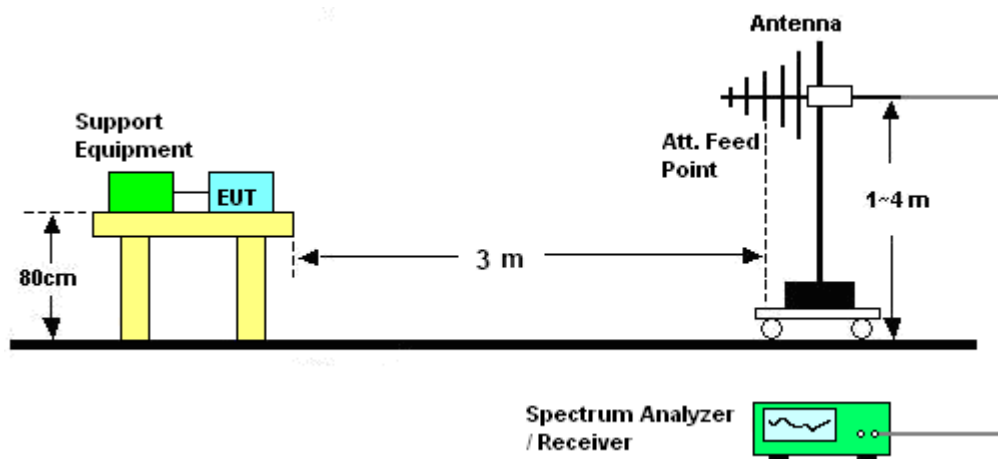

6.2 APPLICABLE STANDARD EN 55014-1:2017

6.3 LIMITS FOR RADIATED DISTURBANCE

Frequency (MHz)	10 m measuring distance	3 m measuring distance
	Quasi-peak dB(uV/m)	Quasi-peak dB(uV/m)
30 ~ 230	30	40
230 ~ 1000	37	47

NOTE 1- At the transition frequency, the more stringent limit shall apply.


6.4 TEST RESULT

Temperature : 22°C Humidity : 53%
Test Model : Operating Power Supply : AC230V/50Hz



Report No. : SFT20MAR268C -2

H:

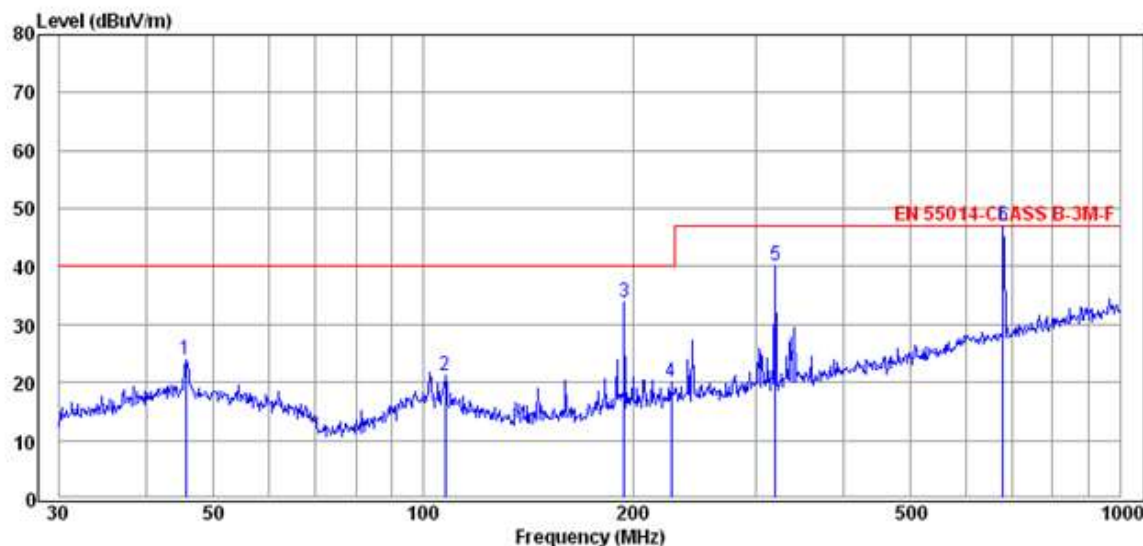


Freq MHz	Reading dBuV	C.F dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Detector
45.54	7.97	15.91	23.88	40.00	16.12	QP
107.51	6.58	14.51	21.09	40.00	18.91	QP
194.45	19.82	14.09	33.91	40.00	6.09	QP
226.89	5.13	15.03	20.16	40.00	19.84	QP
319.94	23.01	17.25	40.26	47.00	6.74	QP
679.96	22.34	24.56	46.90	47.00	0.10	QP

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain



Report No. : SFT20MAR268C -2

V:

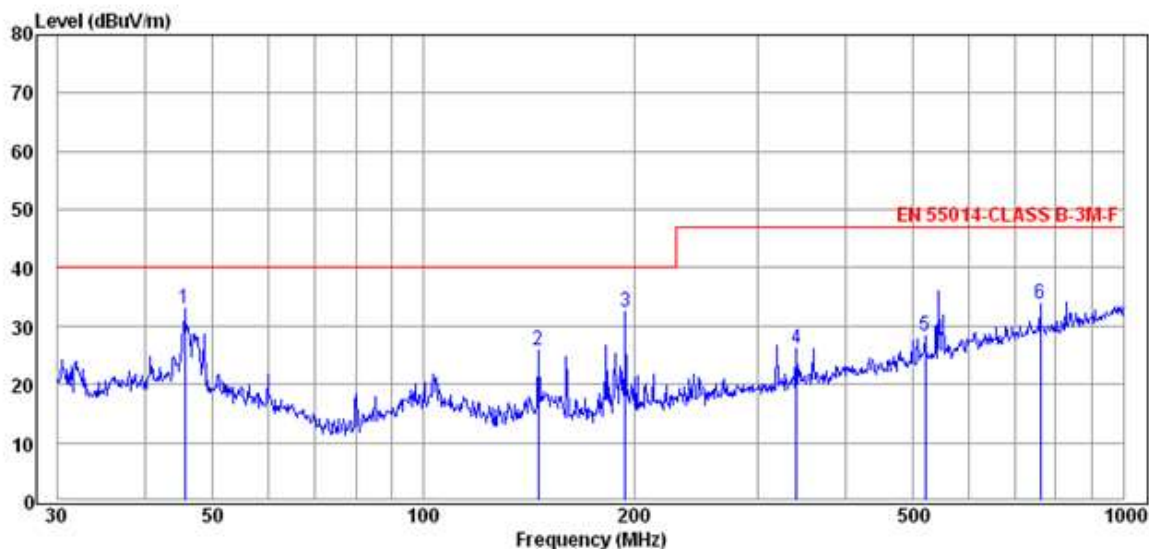

Freq MHz	Reading dBUV	C.F dB/m	Result dBUV/m	Limit dBUV/m	Margin dB	Detector
45.54	17.15	15.91	33.06	40.00	6.94	QP
145.86	14.99	10.98	25.97	40.00	14.03	QP
194.45	18.41	14.09	32.50	40.00	7.50	QP
340.78	7.98	18.15	26.13	47.00	20.87	QP
520.89	6.53	21.88	28.41	47.00	18.59	QP
760.70	7.86	26.01	33.87	47.00	13.13	QP

Remarks: C.F (Correction Factor) = Antenna factor + Cable loss - Preamp gain


6.5 TEST CONCLUSION

PASS



7. DISTURBANCE POWER

7.1 DIAGRAM OF TEST SETUP

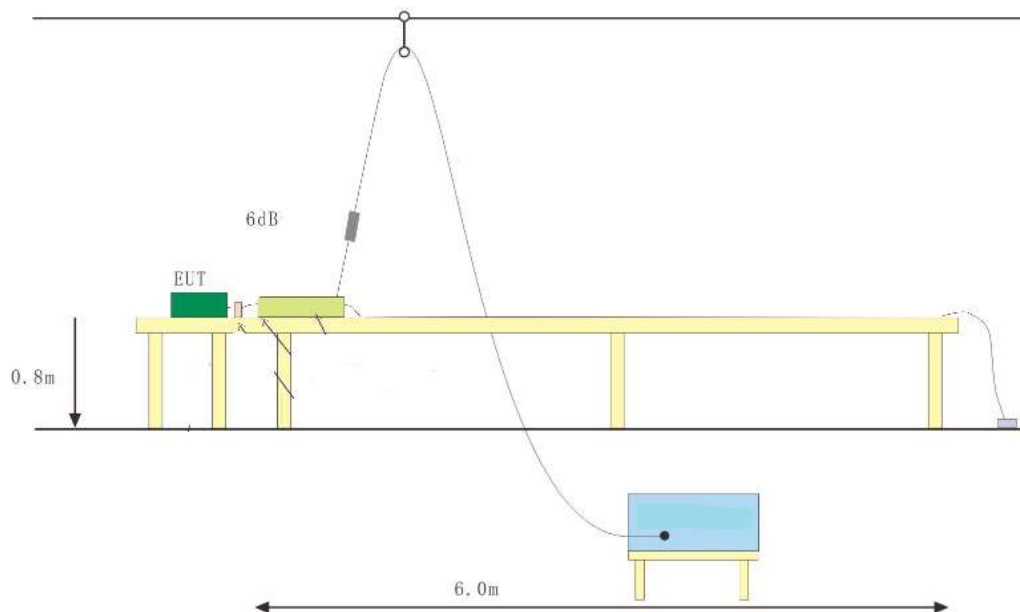

7.2 APPLICABLE STANDARD EN 55014-1:2017

7.3 LIMITS FOR DISTURBANCE POWER

Frequency (MHz)	Quasi-peak dB(pW)	Average dB(pW)
30 ~ 300	45~55	35~45

7.4 TEST RESULT

N/A


7.5 TEST CONCLUSION

N/A



8. HARMONIC CURRENT EMISSION TEST

8.1 DIAGRAM OF TEST SETUP

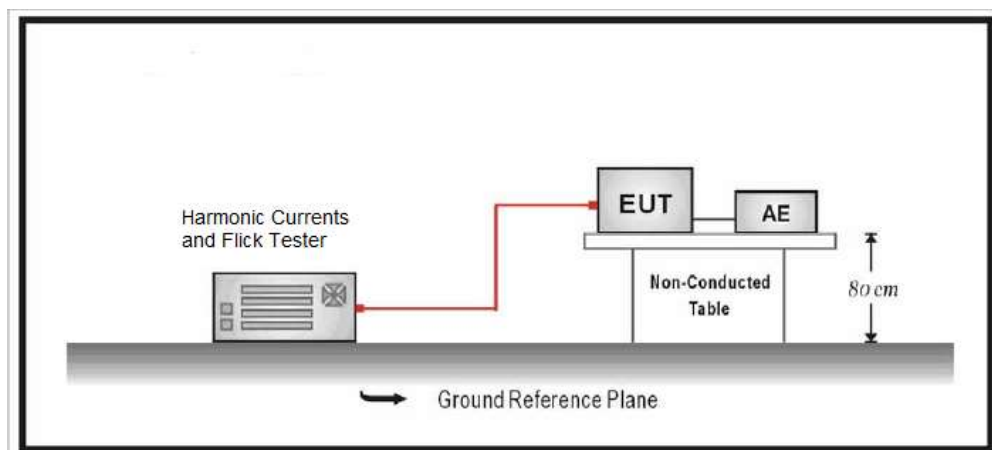

8.2 APPLICABLE STANDARD EN 61000-3-2:2014 (Class A)

8.3 HARMONIC CURRENT LIMITS

Limits for Class A equipment	
Harmonics Order n	Max. permissible harmonics current A
Odd harmonics	
3	2.30
5	1.14
7	0.77
9	0.40
11	0.33
13	0.21
$15 \leq n \leq 39$	$0.15 \times 15/n$
Even harmonics	
2	1.08
4	0.43
6	0.30
$8 \leq n \leq 40$	$0.23 \times 8/n$

8.4 TEST RESULTS

Temperature : 22°C
Test Model : Operating

Humidity : 50%
Power Supply : AC230V/50Hz



Harmonics Results							
Harmonic	Status	Avg (A)	Avg L(A)	Avg %ofL	Peak (A)	Peak L(A)	Peak %ofL
1	PASS	0.19846	No Limit	N/A	0.24107	No Limit	N/A
2	PASS	2E-06	1.08	0.000195	0.00012	1.62	0.007393
3	PASS	0.18353	2.3	7.979566	0.22356	3.45	6.48
4	PASS	2E-06	0.43	0.000579	0.00012	0.645	0.018673
5	PASS	0.1706	1.14	14.96491	0.20503	1.71	11.99006
6	PASS	2E-06	0.3	0.000659	0.00012	0.45	0.026856
7	PASS	0.15255	0.77	19.81169	0.1794	1.155	15.53247
8	PASS	1E-06	0.23	0.000407	6.4E-05	0.345	0.018518
9	PASS	0.13059	0.4	32.6475	0.14887	0.6	24.81167
10	PASS	1E-06	0.184	0.000679	0.00017	0.276	0.061888
11	PASS	0.10641	0.33	32.24545	0.1162	0.495	23.47475
12	PASS	0	0.15333	0.000223	6.4E-05	0.23	0.027959
13	PASS	0.08159	0.21	38.85143	0.08483	0.315	26.92857
14	PASS	0	0.13143	0.000326	6.4E-05	0.19715	0.03263
15	PASS	0.05777	0.15	38.516	0.05873	0.225	26.10133
16	PASS	0	0.115	0.000151	6.5E-05	0.1725	0.037701
17	PASS	0.03649	0.13235	27.57084	0.03824	0.19853	19.26055
18	PASS	0	0.10222	0.000168	6.4E-05	0.15333	0.041951
19	PASS	0.01926	0.11842	16.26246	0.02214	0.17763	12.46636
20	PASS	0	0.092	0	0	0.138	0
21	PASS	0.00935	0.10714	8.724939	0.01265	0.16071	7.871943
22	PASS	0	0.08364	0	0	0.12545	0
23	PASS	0.01044	0.09783	10.66997	0.01845	0.14674	12.57539
24	PASS	0	0.07667	0	0	0.115	0
25	PASS	0.01455	0.09	16.17111	0.02036	0.135	15.07778
26	PASS	0	0.07077	0	0	0.10615	0
27	PASS	0.01623	0.08333	19.47488	0.01879	0.125	15.03286
28	PASS	0	0.06571	0	0	0.09857	0
29	PASS	0.01522	0.07759	19.61952	0.01595	0.11638	13.70522
30	PASS	0	0.06133	0	0	0.092	0
31	PASS	0.01234	0.07258	17.00307	0.01293	0.10887	11.88006
32	PASS	0	0.0575	0	0	0.08625	0
33	PASS	0.00846	0.06818	12.40195	0.00997	0.10227	9.745387
34	PASS	0	0.05412	0	0	0.08118	0
35	PASS	0.00482	0.06429	7.495411	0.00647	0.09643	6.706385
36	PASS	0	0.05111	0	0	0.07667	0
37	PASS	0.00301	0.06081	4.945322	0.00643	0.09122	7.047189
38	PASS	0	0.04842	0	0	0.07263	0
39	PASS	0.00385	0.05769	6.674582	0.00766	0.08654	8.855069
40	PASS	0	0.046	0	0	0.069	0



8.5 TEST CONCLUSION


PASS

SFT



9. VOLTAGE FLUCTUATIONS AND FLICKER TEST

9.1 DIAGRAM OF TEST SETUP

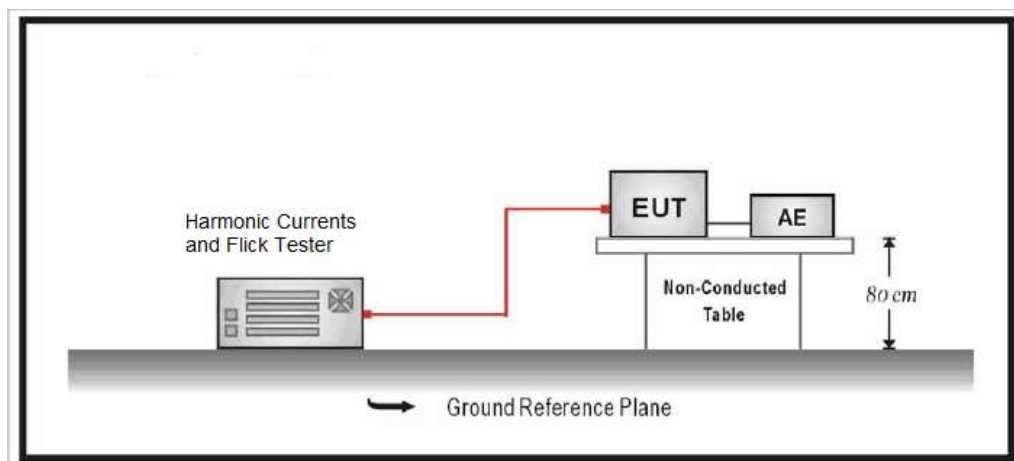

9.2 APPLICABLE STANDARD

IEC 61000-3-3:2013

9.3 VOLTAGE FLUCTUATIONS AND FLICKER EMISSION LIMITS

Test Item	Limit	Note
P_{st}	1.0	Short-term flicker indicator
P_{lt}	0.65	Long-term flicker indicator
$T_{dt}(ms)$	500	Maximum time that dt exceeds 3%
$d_{max}(\%)$	4%	Maximum relative voltage change
$d_c(\%)$	3.3%	Relative steady-state voltage change

9.4 TEST RESULTS

Temperature : 22°C

Humidity : 53%

Test Model : Operating

Power Supply : AC230V/50Hz

Test Parameter	Limit	Measurement Value	Verdict
P_{st}	1.0	0.0828	Pass
P_{lt}	0.65	0.038	Pass
T_{dt}	0.5	0.000	Pass
$D_{max}(\%)$	4%	0.0520%	Pass
$D_c(\%)$	3.3%	0.0140%	Pass


9.5 TEST CONCLUSION

PASS



10. ELECTROSTATIC DISCHARGE IMMUNITY TEST

10.1 DIAGRAM OF TEST SETUP

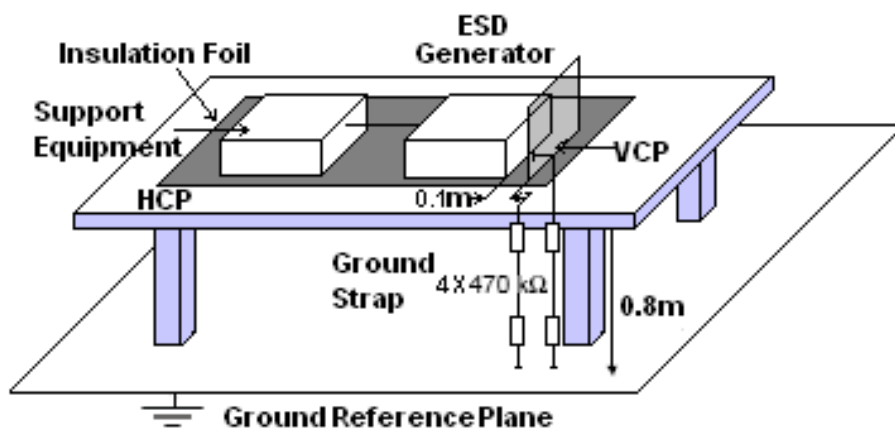

10.2 APPLICABLE STANDARD

IEC 61000-4-2:2008, Contact Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$;
Air Discharge: $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$

10.3 SEVERITY LEVELS AND PERFORMANCE CRITERION

10.3.1 Severity levels

Level	Test Voltage	
	Contact Discharge (kV)	Air Discharge (kV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X	Special	Special

10.3.2 Performance criterion: B

**10.4 TEST RESULT**

Temperature : 25°C Humidity : 45%
Test Model : Operating Power Supply : AC230V/50Hz

Air Discharge Voltage: $\pm 2\text{kV}$, $\pm 4\text{kV}$, $\pm 8\text{kV}$

Contact Discharge Voltage: $\pm 2\text{kV}$, $\pm 4\text{kV}$

Contact Discharge: For each point positive 10 times and negative 10 times discharge

Air Discharge: For each point positive 10 times and negative 10 times discharge

Location	Point	Kind	Result
Around the EUT	4	C (VCP)	P
Around the EUT	4	C (HCP)	P
Metal part of EUT	12	C	P
Gap	/	A	P

NOTE 1 – C (Contact Discharge), A(Air Discharge);

NOTE 2 – HCP (Horizontal Coupling Plane), VCP (Vertical Coupling Plane).


10.5 TEST CONCLUSION

PASS



11. RF ELECTROMAGNETIC FIELD IMMUNITY TEST

11.1 Diagram of Test Setup

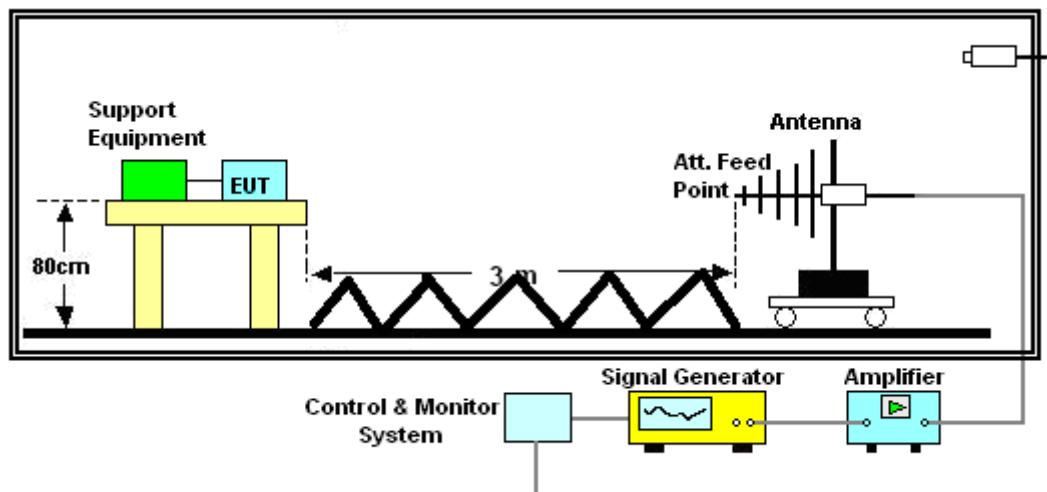

11.2 Applicable Standard

IEC 61000-4-3: 2006+A1:2007+A2:2010;

Field Strength: 3 V/m, Test Value : 80-1000 MHz Modulation: 80% AM 1 kHz

11.3 Severity Levels and Performance Criterion

11.3.1 Severity levels

Level	Field Strength V/m
1	1
2	3
3	10
X	Special

11.3.2 Performance criterion: A



Report No. : SFT20MAR268C -2

11.4 Test Result

Temperature : 24℃ Humidity : 55%
Test Model : Operating Power Supply : AC230V/50Hz

Frequency Range		80 MHz to 1000 MHz,	
Modulation		80% AM 1 kHz	
Steps		1 %	
Dwell Time		3 s	
Field Strength		3V/m	
Antenna Polarization		Horizontal	Vertical
EUT Position	Front	P	P
	Rear	P	P
	Right	P	P
	Left	P	P
	Floor	—	—
	Top	—	—


11.5 TEST CONCLUSION

PASS



12. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

12.1 DIAGRAM OF TEST SETUP

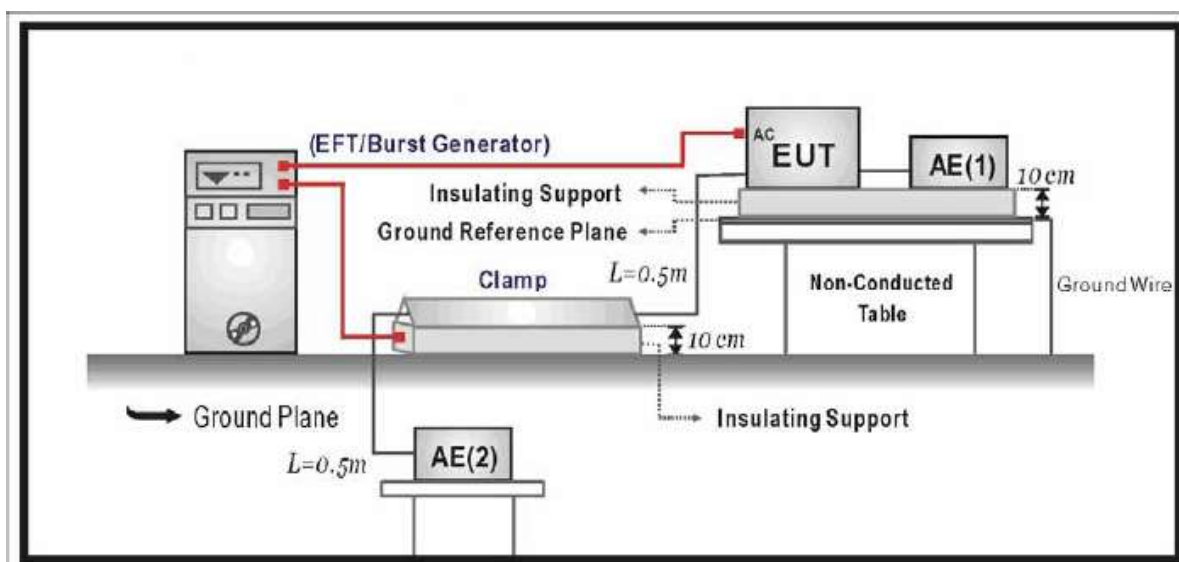

12.2 APPLICABLE STANDARD

IEC 61000-4-4:2012, Test Value: ± 1.0 kV, 5/50ns, 5kHz

12.3 SEVERITY LEVELS AND PERFORMANCE CRITERION

12.3.1 SEVERITY LEVELS

Open circuit output test voltage and repetition rate of the impulses				
Level	On power port, PE		On I/O (input/output) signal, data and control ports	
	Voltage peak kV	Repetition rate kHz	Voltage peak kV	Repetition rate kHz
1.	0.5	5 or 100	0.25	5 or 100
2.	1	5 or 100	0.5	5 or 100
3.	2	5 or 100	1	5 or 100
4.	4	5 or 100	2	5 or 100
Xa	Special	Special	Special	Special
Note 1: Use of 5kHz repetition rates is traditional; however, 100kHz is closer to reality. Product committees should determine which frequencies are relevant for specific products or product types.				
Note 2: With some products, there may be no clear distinction between power ports and I/O ports, in which case it is up to product committees to make this determination for test purposes.				
“Xa” is an open level. The level has to be specified in the dedicated equipment specification.				



Report No. : SFT20MAR268C -2

12.3.2 PERFORMANCE CRITERION: B

12.4 TEST RESULTS

Temperature : 24°C Humidity : 55%
Test Model : Operating Power Supply : AC230V/50Hz

Location	Voltage kV	Repetition rate kHz	Duration of Test (seconds)	Inject Method	Result
AC power ports	± 1	5	120	Direct	P
DC power ports	--	--	--	--	--
Signal line and Control line	--	--	--	--	--
NOTE – "--" means the item is no applicable.					


12.5 TEST CONCLUSION

PASS



13. SURGE IMMUNITY TEST

13.1 Diagram of Test Setup

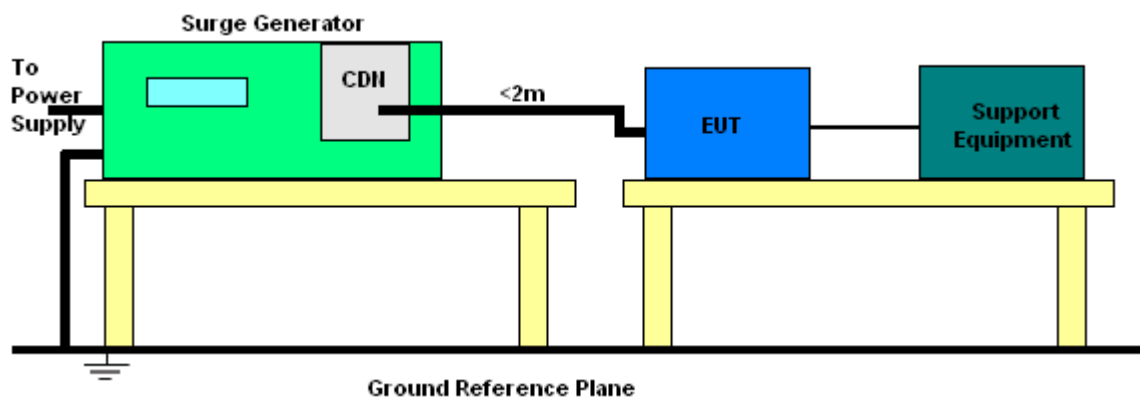

13.2 Applicable Standard

IEC 61000-4-5:2014, Line to line: 1kV; Line to earth: 2kV

13.3 Severity Levels and Performance Criterion

13.3.1 Severity levels

Test Level	Power Supply Coupling Mode	
	Line to Line kV	Line to Earth kV
1	NA	0.5
2	0.5	1.0
3	1.0	2.0
4	2.0	4.0
X	Special	Special

13.3.2 Performance criterion: B



Report No. : SFT20MAR268C -2

13.4 Test Result

Temperature : 24°C

Humidity : 55%

Test Model : Operating

Power Supply : AC230V/50Hz

Location	Polarity		Phase Angle	No. of Pulse	Pulse Voltage (kV)	Result
Line-Line	+	-	0	5	1	P
	+	-	90	5	1	P
	+	-	180	5	1	P
	+	-	270	5	1	P
Line-Earth	+	-	0	5	2	P
	+	-	90	5	2	P
	+	-	180	5	2	P
	+	-	270	5	2	P
DC power ports	--	--	--	--	--	--
Signal line and Control line	--	--	--	--	--	--
NOTE "--" means the item is no applicable.						


13.5 TEST CONCLUSION

PASS



14. INJECTED CURRENT IMMUNITY TEST

14.1 Diagram of Test Setup

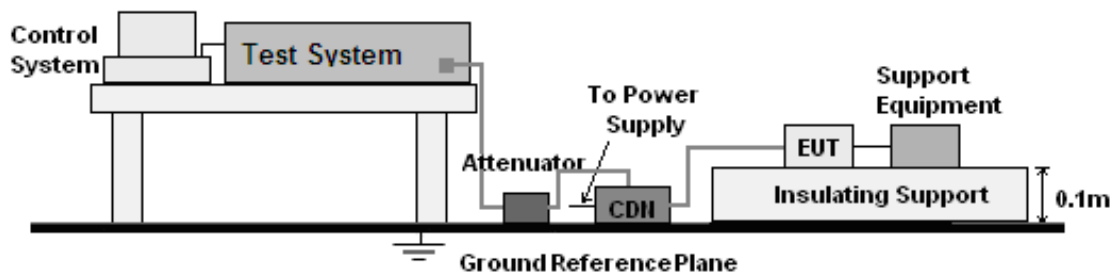

14.2 APPLICABLE STANDARD

IEC 61000-4-6:2013+Cor 1:2015, Test Value : 0.15-230MHz, 3V Modulation, 80%AM 1kHz

14.3 SEVERITY LEVELS AND PERFORMANCE CRITERION

14.3.1 Severity levels

Frequency Range 0.15 MHz – 80 MHz		
Level	Voltage Level (e.m.f.)	
	U0 dB(μV)	U0 (V)
1.	120	1
2.	130	3
3.	140	10
Xa	Special	
Xa is an open level.		

14.3.2 Performance criterion: A

14.4 TEST RESULTS

Temperature : 24°C Humidity : 55%
Test Model : Operating Power Supply : AC230V/50Hz

Frequency Range(MHz)	Injected Position	Strength (Unmodulated)	Criterion	Results
0.15 ~ 230	AC Mains	3V(r.m.s.)	A	P



14.5 TEST CONCLUSION


PASS

SFT



15. VOLTAGE DIPS

15.1 DIAGRAM OF TEST SETUP

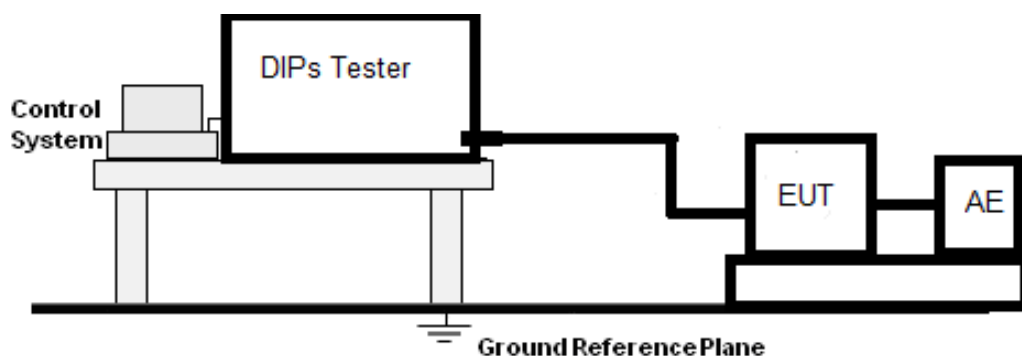

15.2 APPLICABLE STANDARD

IEC 61000-4-11: 2004, Test Value: Voltage dips: 0% during half cycle; 40% during 10 cycles; 70% during 25 cycles.

15.3 SEVERITY LEVELS AND PERFORMANCE CRITERION

15.3.1 Preferred severity levels and durations for voltage dips

Class ^a	Test level and durations for voltage dips (ts) (50Hz/60Hz)				
Class 1	Case-by-case according to the equipment requirements				
Class 2	0% during ½ cycle	0% during 1 cycle	70% during 25/30 ^c cycles		
Class 3	0% during ½ cycle	0% during 1 cycle	40% during 10/12 ^c cycles	70% during 25/30 ^c cycles	80% during 250/300 ^c cycles
Class X ^b	X	X	X	X	X

a Classes as per IEC 61000-2-4.

b To be defined by product committee. For equipment connected directly or indirectly to the public network, the levels must not be less severe than Class 2.

c “25/30 cycles” means “25 cycles for 50Hz test” and “30 cycles for 60Hz test”.

15.3.2 Preferred severity levels and durations for short interruptions:

Class ^a	Test level and durations for short interruptions (ts) (50Hz/60Hz)
Class 1	Case-by-case according to the equipment requirements
Class 2	0% during 250/300 ^c cycles
Class 3	80% during 250/300 ^c cycles
Class X ^b	X



- a Classes as per IEC 61000-2-4.
- b To be defined by product committee. For equipment connected directly or indirectly to the public network, the levels must not be less severe than Class 2.
- c “250/300 cycles” means “250 cycles for 50Hz test” and “300 cycles for 60Hz test”.

15.3.3 Performance criterion:

Voltage dips: 0% during half cycle: C
40% during 10 cycles: C
70% during 25 cycles: C

15.4 TEST RESULTS

Temperature : 24°C Humidity : 55%
Test Model : Operating Power Supply : AC230V/50Hz

Test level (%U _t)	Voltage Dips in %U _t	Duration (cycles)	Phase (in angle)	Voltage phenomenon	Result
0	100	0.5	0°, 45°, 90°, 135°, 180°, 225°, 270°, 315°	Dips	P
40	60	10	0°, 45°, 90°, 135°, 180°, 225°, 270°, 315°	Dips	P
70	30	25	0°, 45°, 90°, 135°, 180°, 225°, 270°, 315°	Dips	P

15.5 TEST CONCLUSION

PASS



APPENDIX 1 PHOTOGRAPHS OF EUT

Photograph1



Photograph 2





APPENDIX 2 PHOTOGRAPHS OF TEST SETUP

Mains Terminal Continuous Disturbance Voltage



Radiated Emission



----End of the report----